

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA9T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 1AMP

Raring Current: 1AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

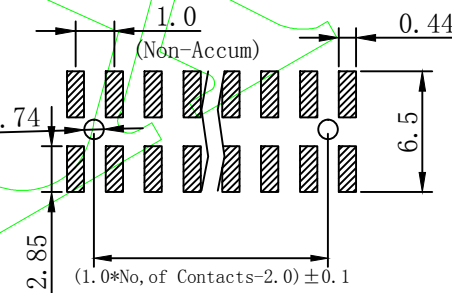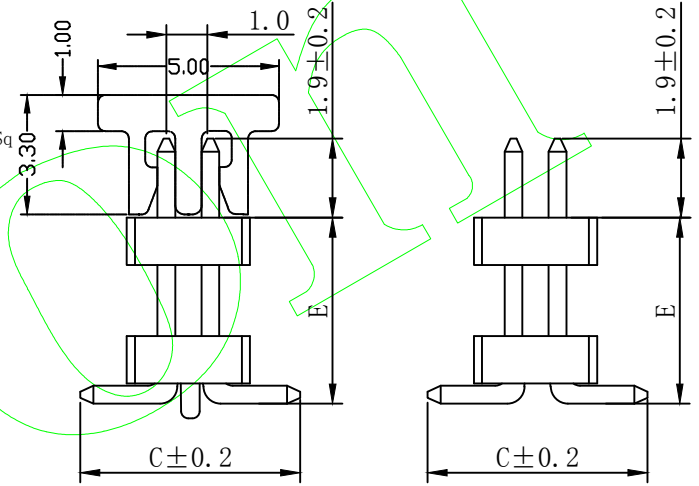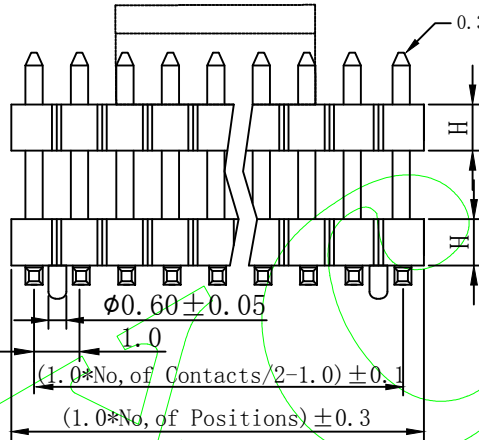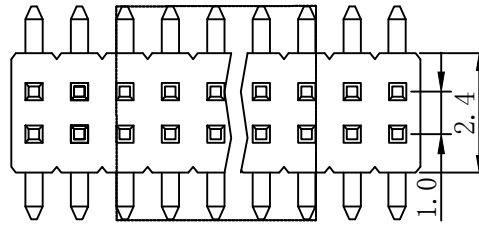

P. C. B LAYOUT

Ordering Information

P4XX-12XX XX X M XXX X 1

HEIGHT OF HOUSING
10 :1.0mm
15 :1.5mm
20 :2.0mm

NO.OF PINS
PER ROW
2~50P

INSULATOR MATERIAL :
A :PBT
B :PA6T
C :PA9T
D :LCP

LENGTH OF TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

Dimension antitheses list

ITEM	A		H			C	
Standard	1.9		1.0	1.5	2.0	5.0	4.8
Alternate							

operatlop

XX	±0.25
XXX	±0.20
XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

APPROLE

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiwang Electronic Technology Co., Ltd.

江泽富

PART NO. P4XX-12XXXXXXMX4

TITLE: 1.00MM双排针双塑 SMT 带夹持盖

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------

1 2 3 4 5 6 7 8 9 10