

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black ,

端子:磷/青铜, 镍底30u"MIN,表面镀金0.8u"MIN

Contact: Phosphor ,0.8u"MIN GOLD PLATING OVERALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 1AMP

Raring Current: 1AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ.MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

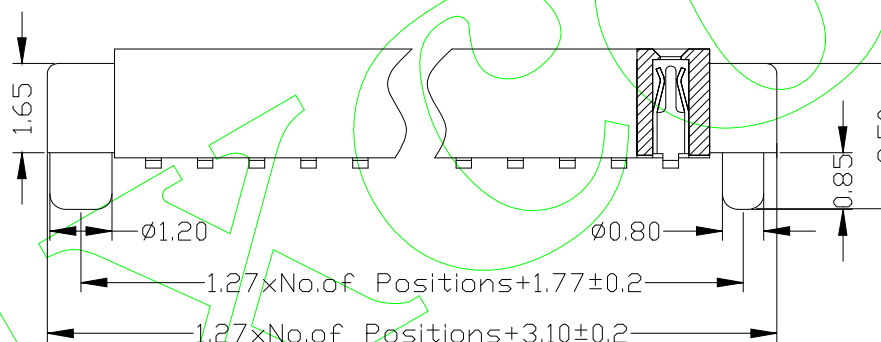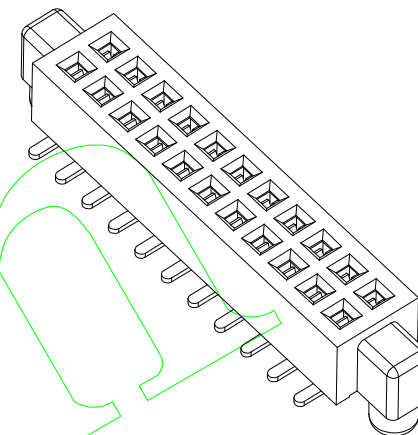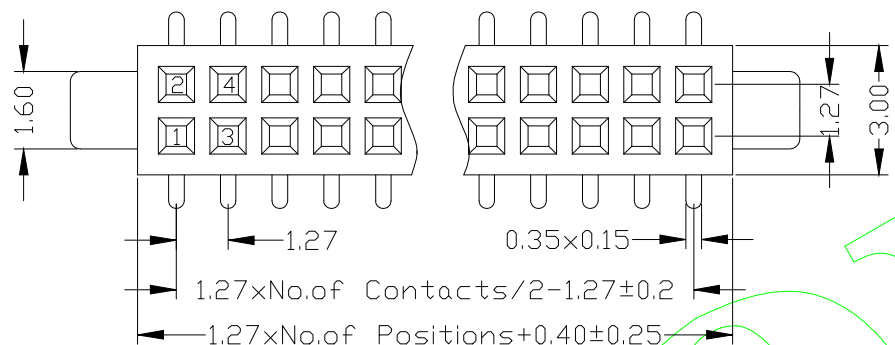

Ordering Information

F3XX-12 XX XX X MU X 2

NO.OF PINS
PER ROW
2~40P


INSULATOR
MATERIAL :

A :PBT
B :PA6T
C:PA9T
D :LCP

PACKING

A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plat ing
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u' B1=1U"
A2=1.5u B2=1.5U"
A3=2u' B3=2U"
A4=3u' B4=3U"

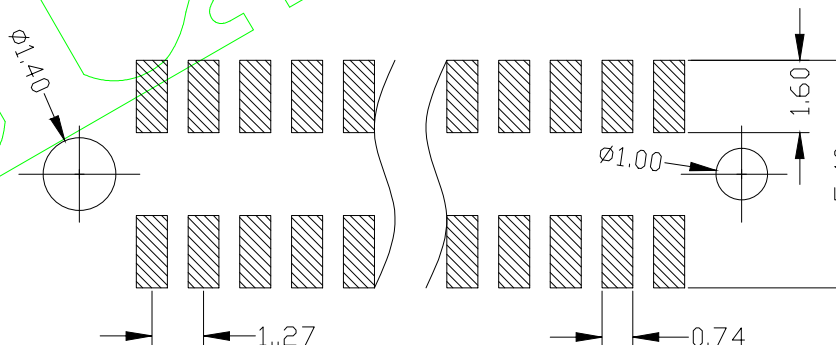

					operatlop		SCALE		Fit		Mxcon 深圳市镁旺电子科技有限公司 Shenzhen Meiwang Electronic Technology Co., ltd.		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DFSIGH	江工	PART NO.	F3XX-12XXXXXXMUX4	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27MM双排母 塑高2.0 SMT U型 带大小柱	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROLE		Customer No.		

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiwang Electronic Technology Co., Ltd.

F3XX-12XXXXXMUX4

1.27MM双排母 塑高2.0 SMT U型 带大小柱