

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black ,

端子:磷/青铜, 镍底30u"MIN,表面镀金0.8u"MIN

Contact: Phosphor ,0.8u"MIN GOLD PLATING OVERALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 1AMP

Raring Current: 1AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ.MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

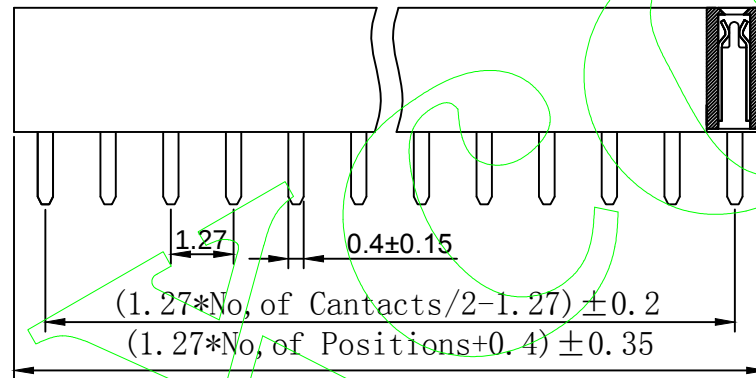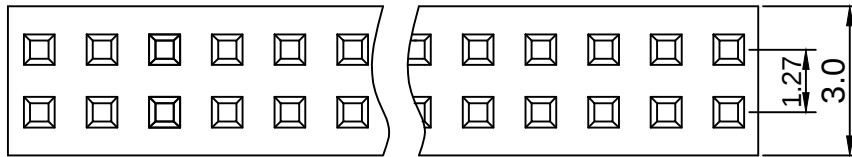

Ordering Information

F3XX-12 XX XX X SU X 0

HEIGHT OF
HOUSING
34 :3.4mm
43 :4.3mm

NO.OF PINS
PER ROW
2~50P

INSULATOR
MATERIAL :


A :PBT
B :PA6T
C :PA9T
D :LCP

PACKING

A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u' B1=1U"
A2=1.5u B2=1.5U"
A3=2u' B3=2U"
A4=3u' B4=3U"

PCB LAYOUT

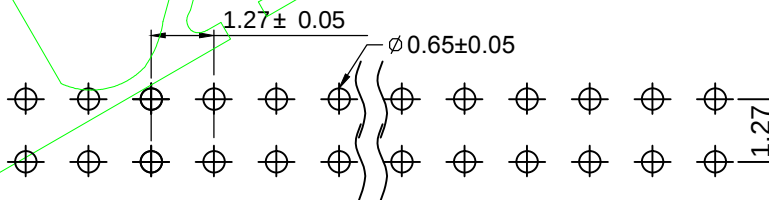

Dimension antitheses list

ITEM	A		H		C		
Standard			3.4	4.3	1.8	2.4	3.0
Alternate							

operatlop

XX	±0.25
XXX	±0.20
XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

APPROLE

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiwang Electronic Technology Co., Ltd.

江泽富

PART NO. F321-12XXXXXSUX0

TITLE: 1.27MM双排母 180° U型

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				
2				
3				
4				
5				