

# Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T/PBT+30%G.F UL94V-0,颜色:黑色.

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 2AMP

Raring Current: 2AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

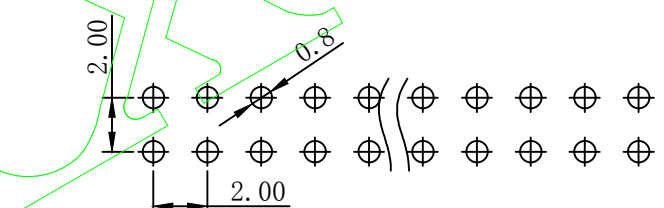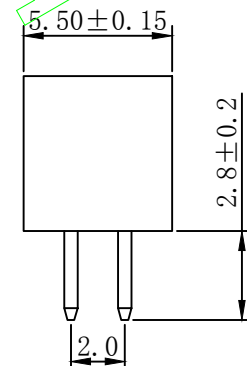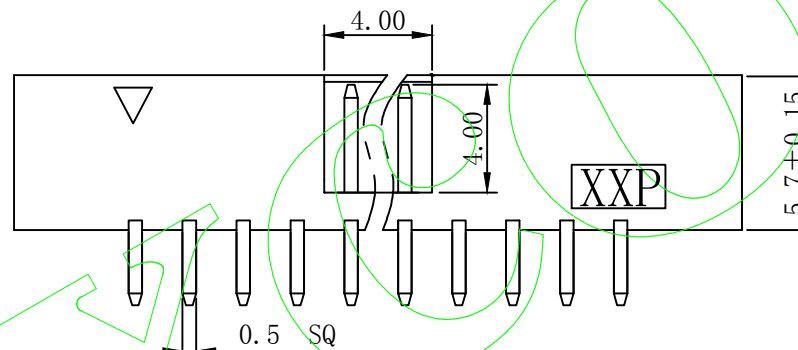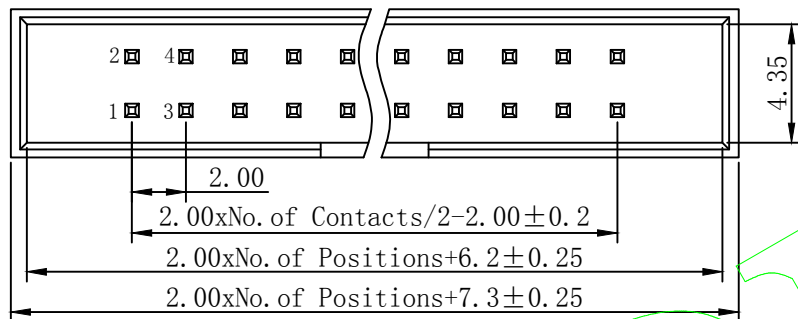

PCB LAYOUT

Plastic Base

Type	
H	
PA	
PC	

## Ordering Information

B257-1 XX XX X S XXX X X

NO.OF PINS PER ROW  
6~66P

INSULATOR MATERIAL:  
A :PBT  
B :PA6T  
C :PA9T  
D :LCP

LENGTH OF TERMINAL

PACKING  
A:PE Bag  
B:Tape & Reel  
C:Tube  
D:Tube+CAP  
E:Tray

Contact Plat ing  
Full Of Gold Semi-gold  
A0=0.8u B0=0.8U"  
A1=1u B1=1U"  
A2=1.5u B2=1.5U"  
A3=2u B3=2U"  
A4=3u B4=3U"

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	operatop	SCALE	Fit	深圳市镁旺电子科技有限公司 Shenzhen Meiwang Electronic Technology Co., Ltd.	
					XX ±0.25	UNIT	MM	Mxcon	江泽富
					XX XX ±0.20	SIZE	A4	DFSIGH	PART NO.
					XXX ±0.10	SHEET	1/1	CHECK	TITLE:
					Angle ±3°	PROJ.	APPROLE		Customer No.
					DIM TOL				

深圳市镁旺电子科技有限公司  
Shenzhen Meiwang Electronic Technology Co., Ltd.

江泽富  
PART NO. B257-1XXXXXSXXXX  
TITLE: 2.00MM筒牛 塑高5.7 180度  
Customer No.