

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T/PBT+30%G.F UL94V-0,颜色:黑色.

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black 黄铜,
四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 3AMP

Raring Current: 3AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperature Range:-40°C to+105°C

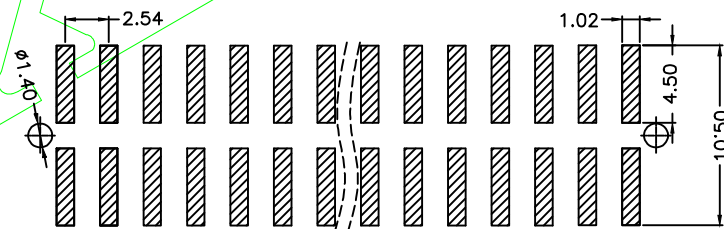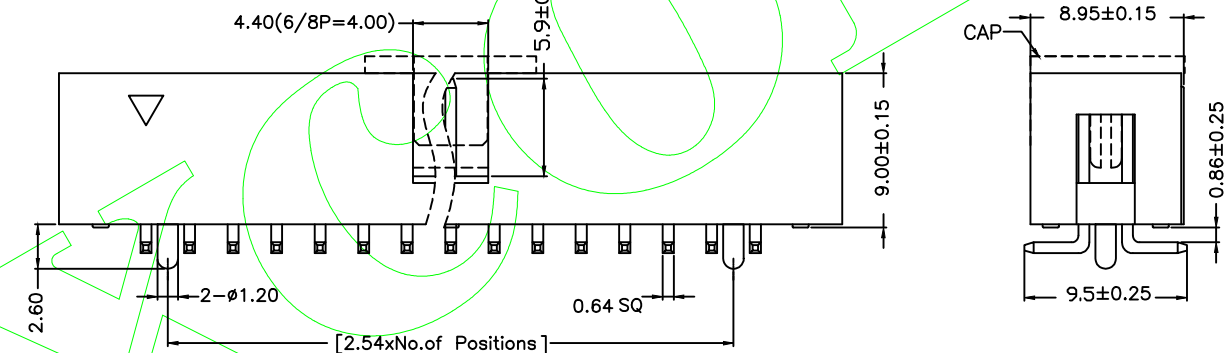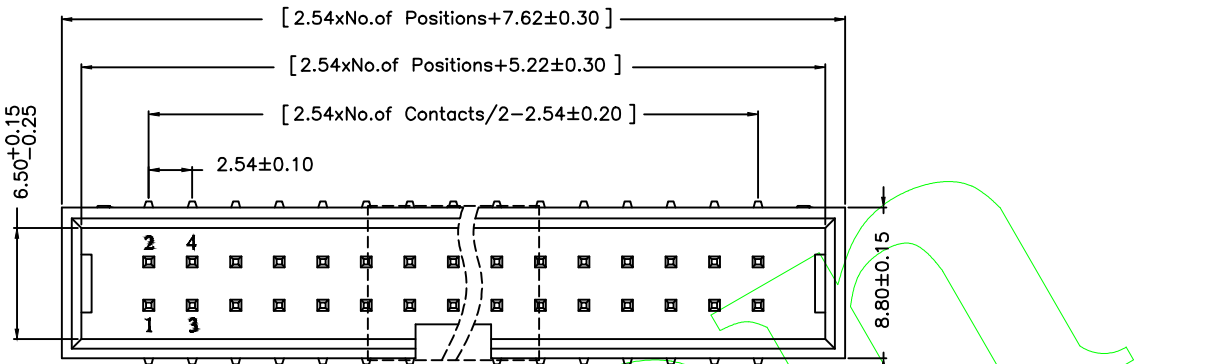

RECOMMENDED PCB LAYOUT
TOLERANCE IS ±0.05

Ordering Information

B190-1 XX XX X M XXX X 1

NO.OF PINS
PER ROW
6-66P

INSULATOR
MATERIAL:
A :PBT
B :PA6T
C :PA9T
D :LCP

LENGTH
OF
TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

				operatop		SCALE		Fit		深圳市镁旺电子科技有限公司 Shenzhen Meiwang Electronic Technology Co., Ltd.	
				XX	±0.25	UNIT		MM			
				XX	±0.20	SIZE	A4	DFSIGH	江泽富	PART NO.	B190-1XXXXXXMXXX1
				XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54MM SMT筒牛 带柱
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROLE		Customer No.	
1					DIM	TOL					