

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black ,

端子:磷/青铜, 镍底30u"MIN,表面镀金0.8u"MIN

Contact: Phosphor ,0.8u"MIN GOLD PLATING OVERALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 1AMP

Raring Current: 1AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ.MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

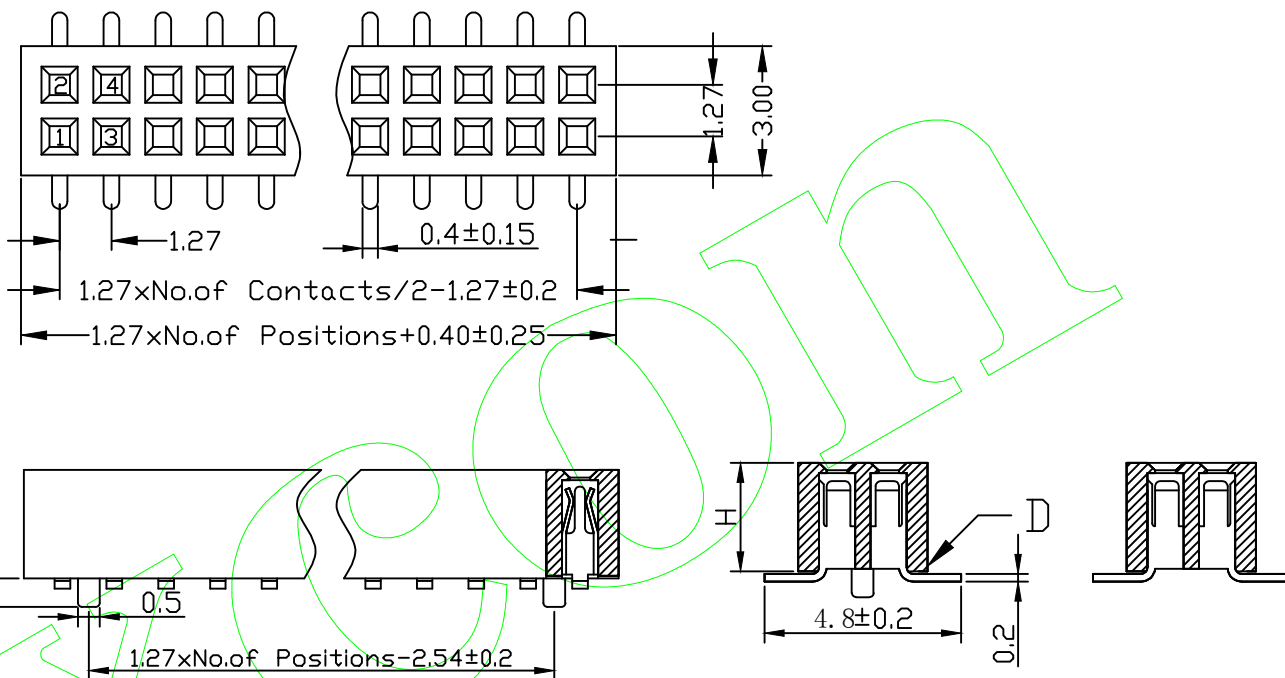

Ordering Information

F343-12 XX XX X MU X 1


HEIGHT OF HOUSING
34 :3.4mm
43 :4.3mm

NO.OF PINS PER ROW
2~50P

INSULATOR MATERIAL :
A :PBT
B :PA6T
C :PA9T
D :LCP

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plat ing
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

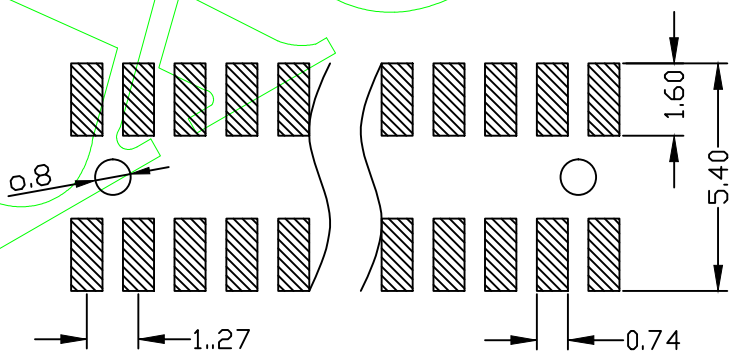

PCB LAYOUT

Dimension antitheses list

ITEM	D	H		C	
Standard	0	3.4	4.3	4.2	4.8
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	operatop	SCALE	Fit	深圳市镁旺电子科技有限公司 Shenzhen Meiwang Electronic Technology Co., Ltd.		
					XX ±0.25	UNIT	MM	江泽富		
					XX XX ±0.20	SIZE	A4	DFSIGH	PART NO.	F343-12XXXXXMUX1
					XXX ±0.10	SHEET	1/1	CHECK	TITLE:	1.27MM双排母 SMT U型
					Angle ±3°	PROJ.	APPROLE	Customer No.		
					DIM TOL					