

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA9T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 1AMP

Raring Current: 1AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

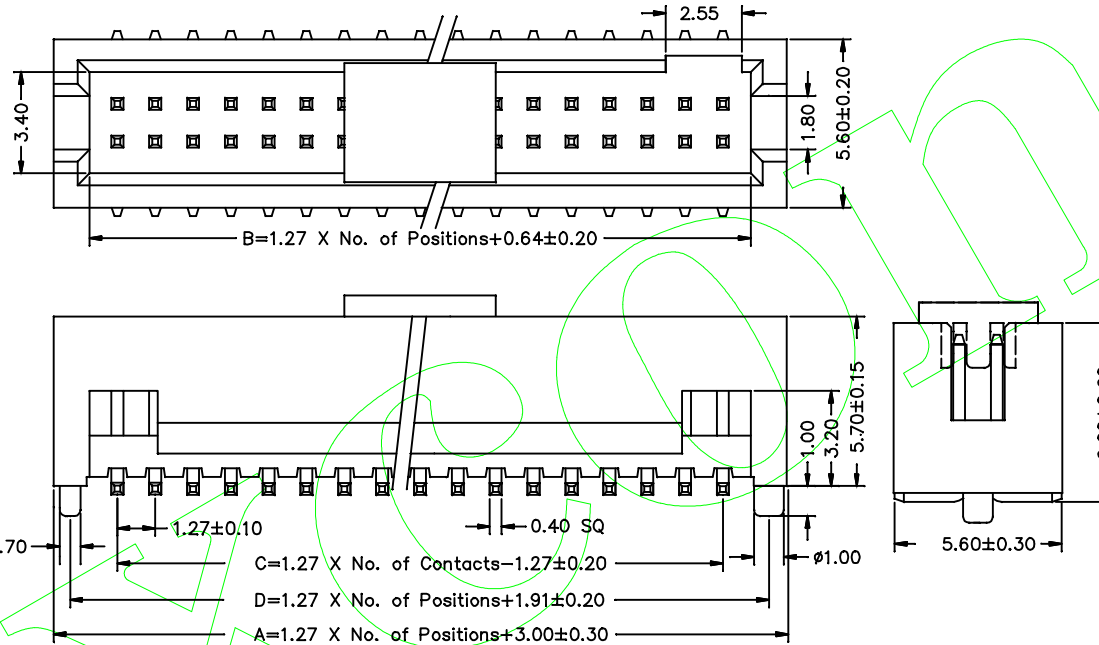

DIM	A	B	C	D
2*5P	9.35	6.89	5.08	8.26
2*6P	10.62	8.26	6.35	9.53
2*7P	11.89	9.53	7.62	10.8
2*8P	13.16	10.80	8.89	12.07
2*9P	14.43	12.07	10.16	13.34
2*10P	15.70	13.34	11.43	14.61
2*11P	16.97	14.61	12.70	15.88
2*12P	18.24	15.88	13.97	17.15
2*13P	19.51	17.15	15.24	18.42
2*14P	20.78	18.42	16.51	19.69
2*15P	22.05	19.69	17.78	20.96
2*16P	23.32	20.96	19.05	22.23
2*17P	24.59	22.23	20.32	23.50
2*18P	25.86	23.50	21.59	24.77
2*19P	27.13	24.77	22.86	26.04
2*20P	28.40	26.04	24.13	27.31
2*21P	29.67	27.31	25.40	28.58
2*22P	30.94	28.58	26.67	29.85
2*23P	32.21	29.85	27.94	31.12
2*24P	33.48	31.12	29.21	32.39
2*25P	34.75	32.39	30.48	33.66
2*26P	36.02	33.66	31.75	34.93
2*27P	37.29	34.93	33.02	36.20
2*28P	38.56	36.20	34.29	37.47
2*29P	39.83	37.47	35.56	38.74
2*30P	41.10	38.74	36.83	40.01
2*31P	42.37	40.01	38.10	41.28
2*32P	43.64	41.28	39.37	42.55
2*33P	44.91	42.55	40.64	43.82
2*34P	46.18	43.82	41.91	45.09
2*35P	47.45	45.09	43.18	46.36
2*36P	48.72	46.36	44.45	47.63
2*37P	49.99	47.63	45.72	48.90
2*38P	51.26	48.90	46.99	50.17
2*39P	52.53	50.17	48.26	51.44
2*40P	53.80	51.44	49.53	52.71
2*41P	55.07	52.71	50.80	53.98
2*42P	56.34	53.98	52.07	55.25
2*43P	57.61	55.25	53.34	56.52
2*44P	58.88	56.52	54.61	57.79
2*45P	60.15	57.79	55.88	59.06
2*46P	61.42	59.06	57.15	60.33
2*47P	62.69	60.33	58.42	61.60
2*48P	63.96	61.60	59.69	62.87
2*49P	65.23	62.87	60.96	64.14
2*50P	66.50	64.14	62.23	65.41

Ordering Information

B3XX-1 XX XX X M XXX X X

HEIGHT OF HOUSING
10 : 1.0mm
15 : 1.5mm

NO.OF PINS PER ROW
2~50P

INSULATOR MATERIAL:
A : PBT
B : PA6T
C : PA9T
D : LCP

LENGTH OF TERMINAL

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

0.4X7.3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	operatop	SCALE	Fit	Mxcon 深圳市镁旺电子科技有限公司 Shenzhen Meiwang Electronic Technology Co., Ltd.				
					XX ±0.25	UNIT	MM	SIZE	A4	DFSIGH	PART NO.	B3XX-1XXXXMXXXX
					XX ±0.20	SHEET	1/1	CHECK	江泽富	CHEK	TITLE:	1.27MM双筒牛 SMT
					XX ±0.10	PROJ.	APPROLE				Customer No.	
					Angle ±3°							
					DIM TOL							