

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA9T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 1AMP

Raring Current: 1AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

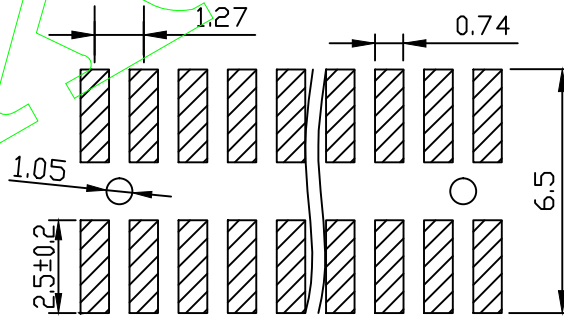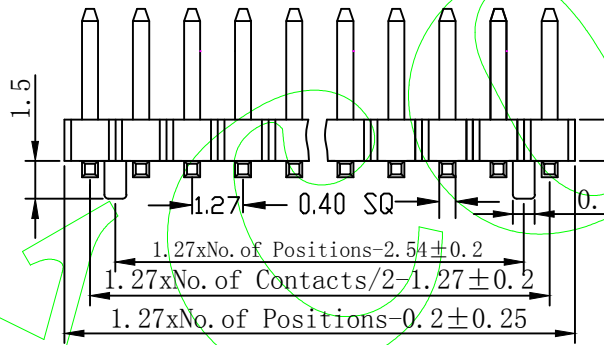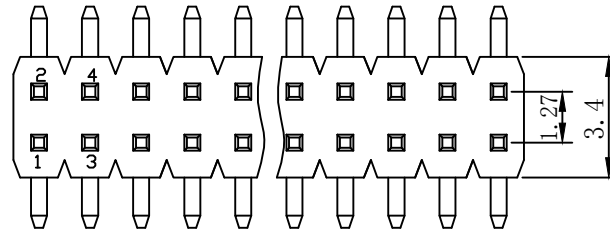

PCB LAYOUT

Ordering Information

P3XX-12 XX XX X M XXX X X

HEIGHT OF HOUSING
10 :1.0mm
15 :1.5mm

NO.OF PINS PER ROW
2~50P

INSULATOR MATERIAL :
A :PBT
B :PA6T
C :PA9T
D :LCP

LENGTH OF TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

Dimension antitheses list

ITEM	A		H		D		C
Standard	2.0	4.0	1.0	1.5	0	5.3	5.5
Alternate							

					operatlop		SCALE		Fit								
					XX	±0.25											
					XXX	±0.20	UNIT		MM								
					XXX	±0.10	SIZE	A4	DFSIGH	江泽富	PART NO.		P3XX-12XXXXXXMXXXXX				
					Angle	±3°	SHEET	1/1	CHECK		TITLE:		1. 27MM双排针 SMT				
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.	APPROLE			Customer No.						
1					4		6										

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiwang Electronic Technology Co., Ltd.