

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T/PBT+30%G.F UL94V-0,颜色:黑色.

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 2AMP

Raring Current: 2AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

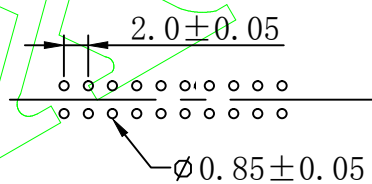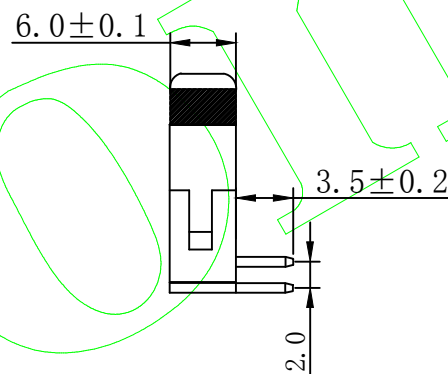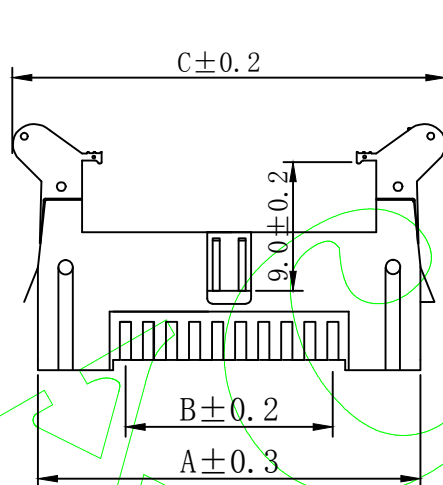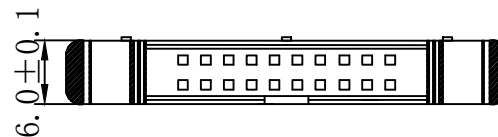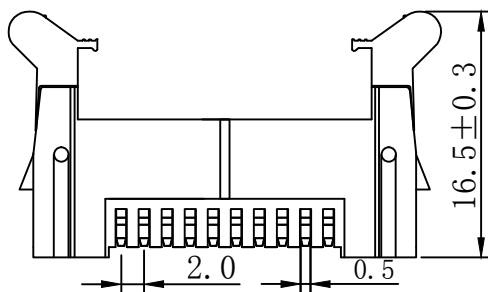

Ordering Information

E2XX-1 XX XX X R XXX X X

HEIGHT OF HOUSING
57:5.7mm

NO.OF PINS PER ROW
6~66P

INSULATOR MATERIAL:
A :PBT
B :PA6T
C :PA9T
D :LCP

LENGTH OF TERMINAL

PACKING:
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

NUMBER OF POSITION	Dimensions		
	A	B	C
10	25.8	8.0	29.4
14	29.8	12.0	33.4
16	31.8	14.0	35.4
20	35.8	18.0	39.4
24	39.8	22.0	43.4
26	41.8	24.0	45.4
30	45.8	28.0	49.4
34	49.8	32.0	53.4
40	55.8	38.0	59.4
50	65.8	48.0	69.4
60	75.8	58.0	79.4
64	79.8	62.0	83.4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	operatlop		SCALE		Fit	江泽富	PART NO.	E2XX-1XXXXRXXXX
					XX	±0.25	UNIT		MM			
					XX	±0.20	SIZE	A4	DFSIGH			
					XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00MM牛角 90度
					Angle	±3°	PROJ.	☯	APPROLE		Customer No.	
					DIM	TOL						

Mxcon

深圳市镁旺电子科技有限公司
Shenzhen Meiwang Electronic Technology Co., Ltd.