

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T+30%G.F UL94V-0,颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black ,

端子:磷/青铜, 镍底30u"MIN,表面镀金0.8u"MIN

Contact: Phosphor ,0.8u"MIN GOLD PLATING OVERALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 2AMP

Raring Current: 2AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ.MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperature Range:-40°C to+105°C

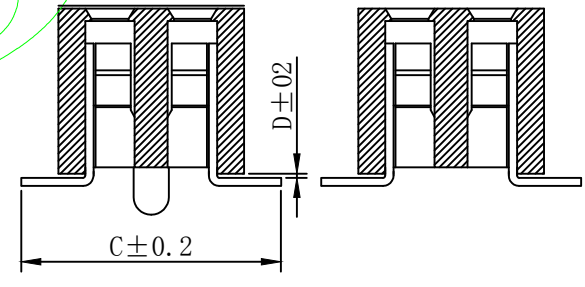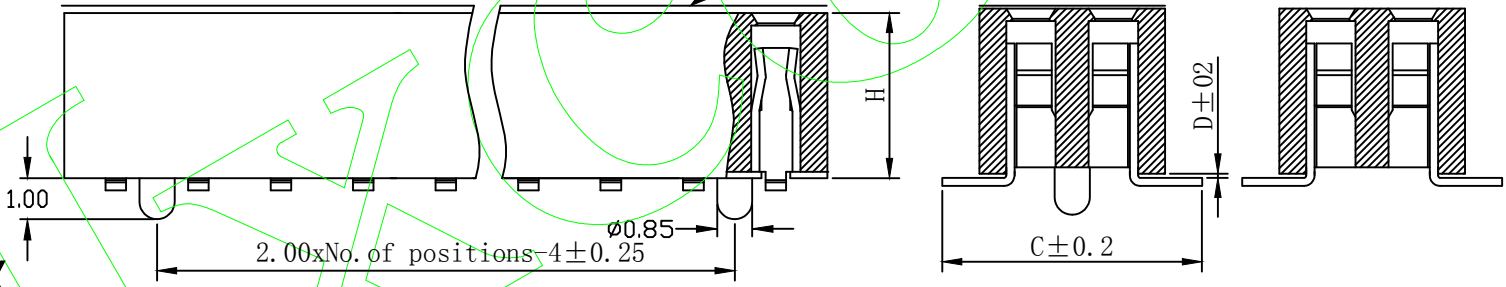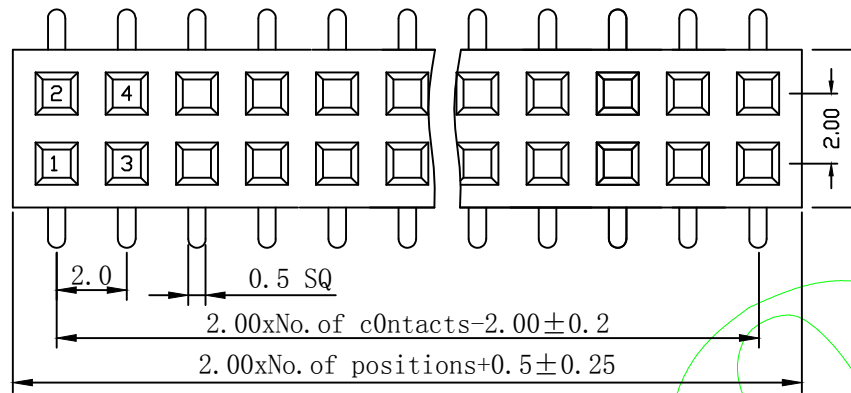

Ordering Information

F2XX-12 XX XX X MU X X


HEIGHT OF HOUSING
40 :4.0mm
43 :4.3mm
45 :4.5mm

NO.OF PINS PER ROW
2~40P

INSULATOR MATERIAL:
A :PBT
B :PA6T
C :PA9T
D :LCP

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

Contact Plating
Full Of Gold Semi-gold
A0=0.8u B0=0.8U"
A1=1u B1=1U"
A2=1.5u B2=1.5U"
A3=2u B3=2U"
A4=3u B4=3U"

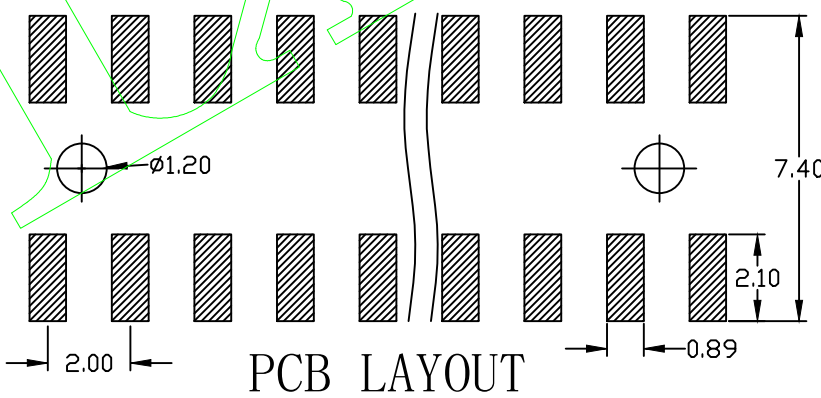

| Dimension antitheses list | | | | | | |
|---------------------------|---|-----|-----|-----|-----|-----|
| ITEM | D | H | | | C | |
| Standard | 0 | 4.0 | 4.3 | 4.5 | 6.2 | 6.5 |
| Alternate | | | | | | |

| | | | | | | | | | | | | | | | |
|-----|------|--------------------------|--|--|----------|---------|-------|---------|--------|-----|---|-------------------------|--|--|--|
| | | | | | operatop | | SCALE | | Fit | | 深圳市镁旺电子科技有限公司 Shenzhen Meiwang Electronic Technology Co., Ltd. | | | | |
| | | | | | XX | ±0.25 | UNIT | | MM | | | | | | |
| | | | | | XX | ±0.20 | SIZE | A4 | DFSIGH | 江泽富 | PART NO. | F2XX-12XXXXXMUX | | | |
| | | | | | XXX | ±0.10 | SHEET | 1/1 | CHECK | | TITLE: | 2.0双排母 SMT,U型镀金/PA6T料黑色 | | | |
| REV | DATE | MODIFICATION DESCRIPTION | | | CHANGE | APPROVE | PROJ. | APPROLE | | | Customer No. | | | | |