

# Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T/PBT+30%G.F UL94V-0,颜色:黑色.

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 3AMP

Raring Current: 3AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperature Range:-40°C to+105°C

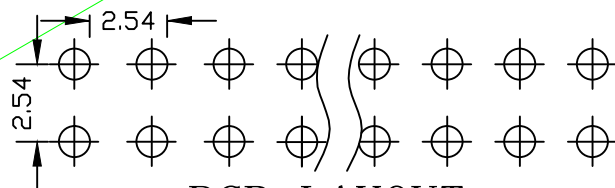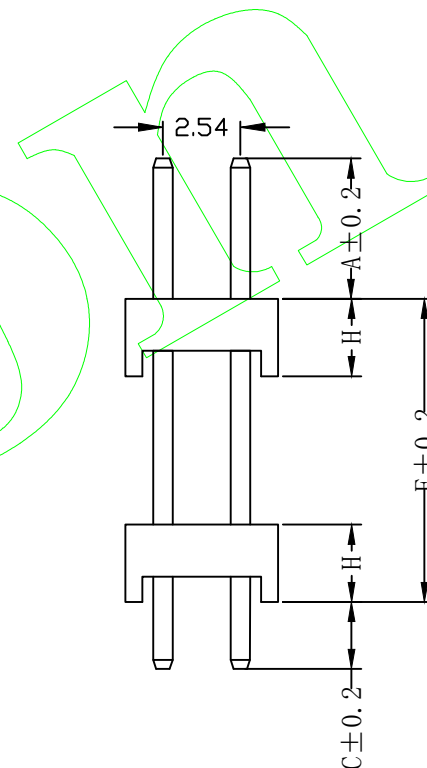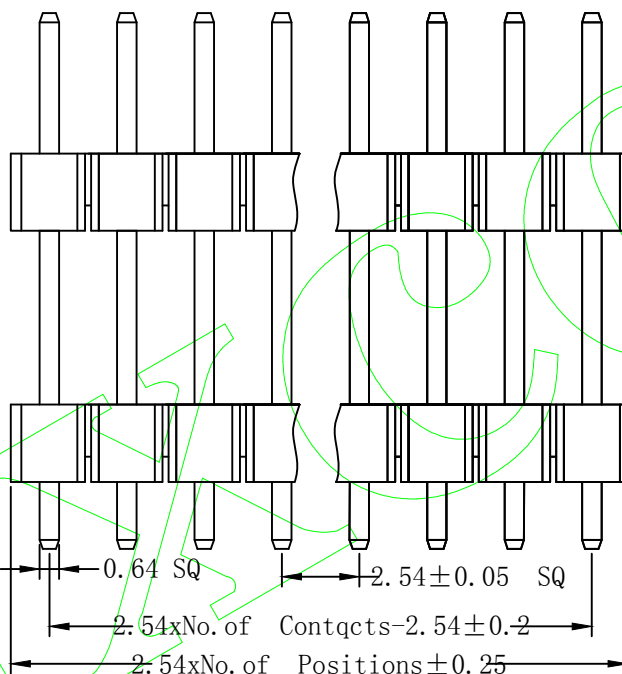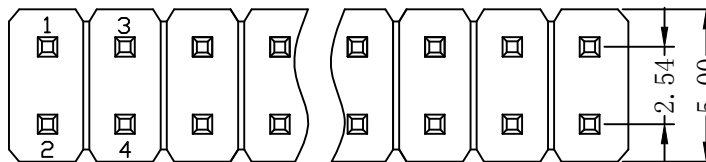

PCB LAYOUT

## Ordering Information

P1XX-22 XX XX X S XXX X 0

HEIGHT OF HOUSING  
15:1.5mm  
20:2.0mm  
25:2.5mm

NO.OF PINS PER ROW  
2~40P

INSULATOR MATERIAL:  
A :PBT  
B :PA6T  
C :PA9T  
D :LCP

LENGTH OF TERMINAL

PACKING:  
A:PE Bag  
B:Tape & Reel  
C:Tube  
D:Tube+CAP  
E:Tray

Contact Plating  
Full Of Gold Semi-gold  
A0=0.8u B0=0.8U"  
A1=1u" B1=1U"  
A2=1.5u B2=1.5U"  
A3=2u" B3=2U"  
A4=3u" B4=3U"

Dimension antitheses list					
ITEM	A	H	E	C	
Standard	6.0	5.7	1.5	2.0	2.5
Alternate					

					operatop		SCALE		Fit		深圳市镁旺电子科技有限公司				
					XX	±0.25	UNIT		MM		Mxcon		Shenzhen Meiwang Electronic Technology Co., ltd.		
					X,XX	±0.20	SIZE	A4	DFSIGH	江泽富		PART NO.	P1XX-22XXXXXXSXXXX0		
					X,XXX	±0.10	SHEET	1/1	CHECK			TITLE:	2.54MM 双排双塑针 180度		
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	Angle	±3°	PROJ.	APPROLE	Customer No.				
							DIM	TOL							