

# Specifications

## 备注(Remark)

### 1.材料(MATERIAL)

胶芯:PA6T/PBT+30%G.F UL94V-0,颜色:黑色.

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black 黄铜,

四方针:镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

### 2.特性(characteristics):

额定电流: 3AMP

Raring Current: 3AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperture Range:-40°C to+105°C

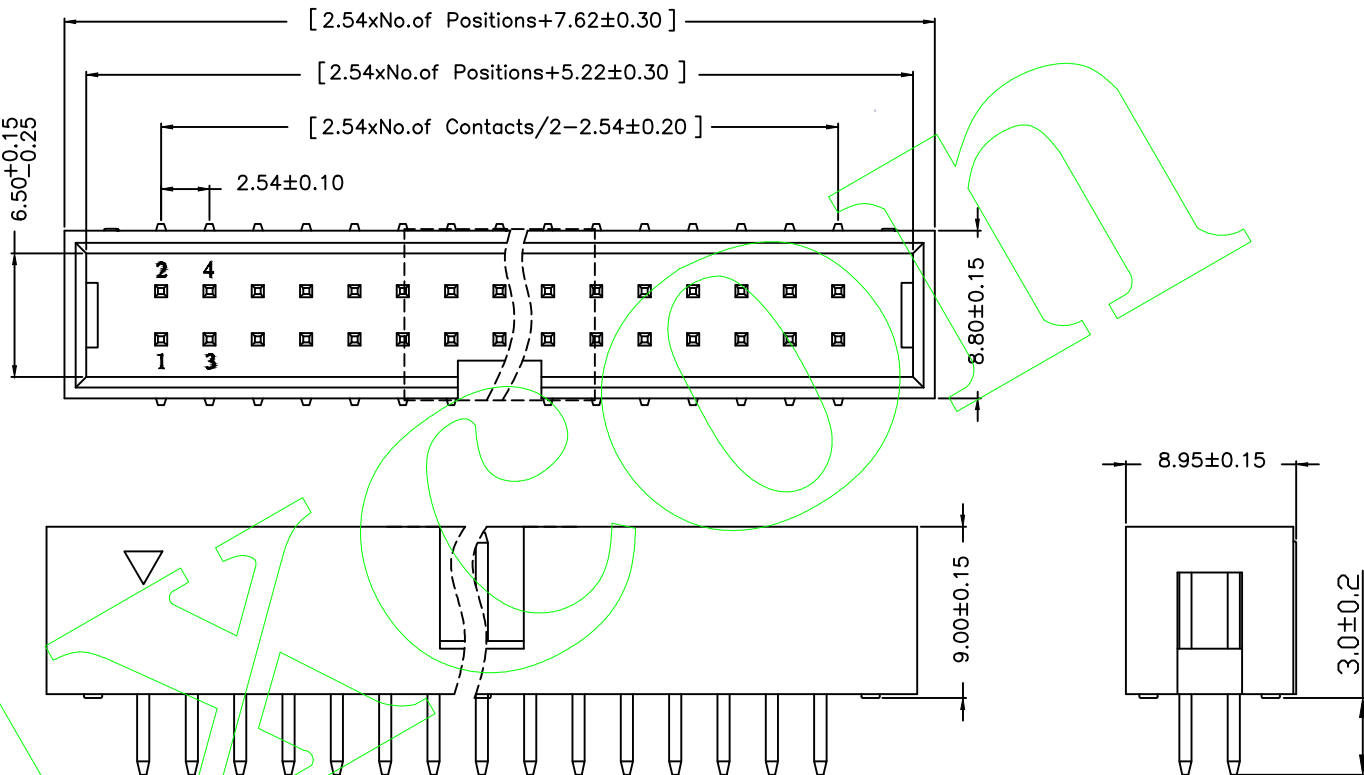

## Ordering Information

B190-1 XX XX X S XXX X 0


NO.OF PINS  
PER ROW  
6~66P

INSULATOR  
MATERIAL:  
A:PBT  
B:PA6T  
C:PA9T  
D:LCP

LENGTH  
OF  
TERMINAL

PACKING  
A:PE Bag  
B:Tape & Reel  
C:Tube  
D:Tube+CAP  
E:Tray

Contact Plating  
Full Of Gold Semi-gold  
A0=0.8u B0=0.8U"  
A1=1u B1=1U"  
A2=1.5u B2=1.5U"  
A3=2u B3=2U"  
A4=3u B4=3U"

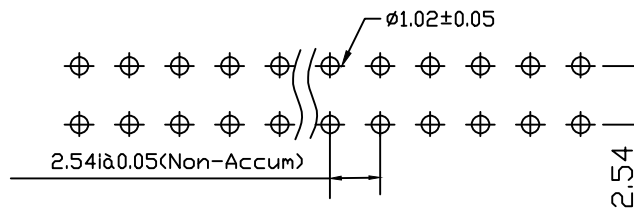

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | operatlop |       | SCALE |     | Fit     | Mxcon 深圳市镁旺电子科技有限公司<br>Shenzhen Meiwang Electronic Technology Co., Ltd. |              |                  |  |
|-----|------|--------------------------|--------|---------|-----------|-------|-------|-----|---------|-------------------------------------------------------------------------|--------------|------------------|--|
|     |      |                          |        |         | XX        | ±0.25 | UNIT  |     | MM      |                                                                         |              |                  |  |
|     |      |                          |        |         | XXX       | ±0.20 | SIZE  | A4  | DFSIGH  | 江泽富                                                                     | PART NO.     | B190-1XXXXXSXXX0 |  |
|     |      |                          |        |         | XXX       | ±0.10 | SHEET | 1/1 | CHECK   |                                                                         | TITLE:       | 2.54MM筒牛 180度    |  |
|     |      |                          |        |         | Angle     | ±3°   | PROJ. | ◆   | APPROLE |                                                                         | Customer No. |                  |  |
|     |      |                          |        |         | DIM       | TOL   |       |     |         |                                                                         |              |                  |  |